

VieTape CP71 Series

CREPE PAPER TAPE

DESCRIPTION

VietTape CP71 series is a crepe paper tape featuring a rubber adhesive. This adhesive offers excellent stickiness to a wide range of surfaces. The crepe paper backing provides strong tensile strength..


APPLICATIONS

General purpose from bonding, bunding, holding and light duty masking.

Can be used widely in almost industries from appliances automotives, electronics,..

Typical applications: automotive decoration & body painting, bunding and fixing for appliances internal wires such as refrigerator and washing machine.

STRUCTURE

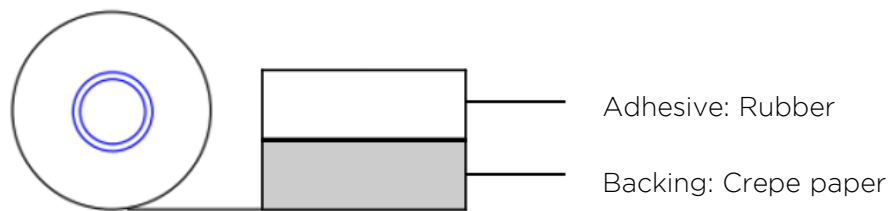

PERFORMANCE

Vietape CP71 Series			
Items	CP7104	CP7105	CP7106
Color	Yellow Cream	White	White to Yellow Cream
Tape thickness	0.13mm	0.14mm	0.15mm
Tolerance	10%	10%	10%
Size: Length, Width	Optional	Optional	Optional
Adhesive Type	Rubber	Rubber	Rubber
Backing	Crepe paper	Crepe paper	Crepe paper
Size: Length, Width	Optional	Optional	Optional



VieTape CP71 Series

CREPE PAPER TAPE

PERFORMANCE (Cont)

Vietape CP71 Series			
Items	CP7104	CP7105	CP7106
Weight	75g/m ²	85 g/m ²	75g/m ²
Tensile Strength	70N/25mm	80 N/25mm	80N/25mm
Elongation	8%	10%	10%
Adhesion to steel	7N/25mm	8N/25mm	8N/25mm
Long Term temperature resistance	80°C	90°C	90°C

DIRECTION OF USE

Temperatures between 21 and 30°C are ideal for application.

For greater substrate contact, pressure-sensitive adhesives use viscous flow. Better adhesive contact is created by applying firm application pressure, which also strengthens the bond. For operation at low temperatures, this is particularly crucial.

The bonding surfaces must be thoroughly united, clean, and dry in order to achieve the best adhesion. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane. Please take the appropriate precautions to handle solvents safely.

SHELF LIFE

12 months from date of manufacture when stored at 10 - 30°C and 0 - 75% relative humidity.

The optimal storage conditions are 22°C and 50% relative humidity.

The above values are sample observed values, we do not guarantee the actual performance due to the different of application method, bonding design, bonding substrate.. We highly recommend customer to test in the real part

