

## VieTape PER7100

### PE EXTRUDED CLOTH TAPE


#### DESCRIPTION

Vietape PER7100 composed of PE extruded cloth as backing material and coated with rubber adhesive. PE extruded cloth is a non-woven fabric made from polyethylene. PE extruded cloth offers excellent resistance to moisture, chemicals, and abrasion.

#### APPLICATIONS

- For most general applications from light duty sealing, bundling, marking and temporary repairs
- Sealing of plumbing, fastening of sealing materials, generally marking works, pasting on wood, plaster and bricks, fixing, sealing, closing, packing...

#### STRUCTURE

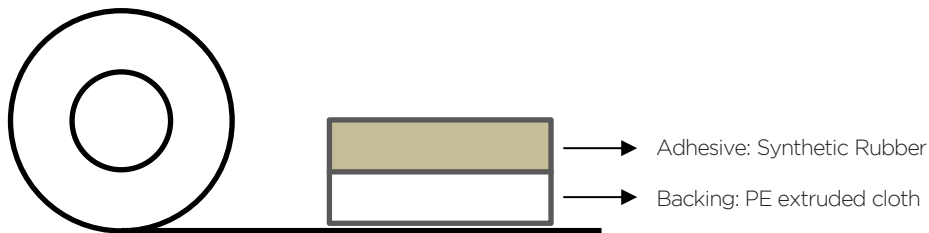

#### PERFORMANCE

Properties	Value
Color	Matte Gray
Backing	PE Extruded Cloth
Tape thickness	0.28mm
Thickness tolerance	± 10%
Tensile strength	150N/25mm
Elongation	15%
Adhesion to steel	15N/25mm
Long-term temperature resistance	90°C



### **VieTape PER7100** **PE EXTRUDED CLOTH TAPE**

#### **DIRECTION OF USE**

Temperatures between 21 and 38°C are ideal for application.

For greater substrate contact, pressure-sensitive adhesives use viscous flow. Better adhesive contact is created by applying firm application pressure, which also strengthens the bond. For operation at low temperatures, this is particularly crucial.

The bonding surfaces must be thoroughly united, clean, and dry in order to achieve the best adhesion. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane. Please take the appropriate precautions to handle solvents safely.

#### **SHELF LIFE**

Store in a clean, dry place. Temperature of 10-35°C and 40-70% relative humidity are recommended. Rotate your stock. To obtain best performance, use this product within 12 months from date of manufacture.

The above values are sample observed values, we do not guarantee the actual performance due to the different of application method, bonding design, bonding substrate.. We highly recommend customer to test in the real part

