

VieTape AF7201

DOUBLE -SIDED ACRYLIC FOAM TAPE


DESCRIPTION

AF7201 is a double-sided acrylic foam tape in gray color with high initial. Many different metals, plastics, and painted materials are among the many substrates that AF7201 can adhere to. It is suitable for stiffeners used on equipment enclosures, metal cabinets, appliances, signage, etc.

APPLICATION

This product is used for bonding and sealing, which creates excellent seal against water, moisture, etc. It is a fast and convenient permanent bonding method that provides high strength, and long-term durability.

STRUCTURE

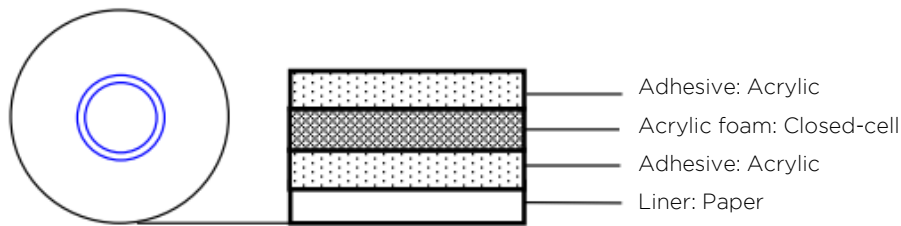

FEATURE

Item	Parameter
Color	Gray
Tape thickness	0.4 mm
Thickness tolerance	± 10%
Adhesive type	Acrylic
Foam type	Acrylic foam (closed-cell)
Density	0.78 g/cm ³



VieTape AF7201

DOUBLE -SIDED ACRYLIC FOAM TAPE

TYPICAL PERFORMANCE PROPERTIES

Properties	Value	Method
90° Peel Adhesion	23N/cm (SUS) 20N/cm(Aluminum) 27N/cm (Glass)	ASTM D3330
Tensile strength	730 kPa	ASTM D897
Dynamic shear strength	1370 kPa	ASTM D1002
Short term temperature resistance	150°C	
Long term temperature resistance	90°C	

DIRECTION OF USE

Temperatures between 21 and 38°C are ideal for application.

Our analysis indicates that AF7201 can be used in some applications at temperatures as low as 0 to 5°C. (Note: Depending on the substrate, different low-temperature operations are possible.)

For greater substrate contact, pressure-sensitive adhesives use viscous flow. Better adhesive contact is created by applying firm application pressure, which also strengthens the bond. For operation at low temperatures, this is particularly crucial.

The bonding surfaces must be thoroughly united, clean, and dry in order to achieve the best adhesion. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane. Please take the appropriate precautions to handle solvents safely.

SHELF LIFE

24 months from date of manufacture when stored at 10 - 35°C and 50 - 75% relative humidity.

The optimal storage conditions are 23°C and 50% relative humidity.

The above values are sample observed values, we do not guarantee the actual performance due to the different of application method, bonding design, bonding substrate.. We highly recommend customer to test in the real part.

Issue date: September 2022

VIETAPE MATERIAL TECHNOLOGY CO., LTD

18F Tang Nhon Phu Street, Phuoc Long B District,
Thu Duc City, Ho Chi Minh City, Vietnam

info@vietape.com
(+84) 869 681639

www.vietape.com

