

## VieTape NW7200

### DOUBLE-SIDED NON-WOVEN TAPE


#### DESCRIPTION

VieTape NW7200 is double sided non-woven tape with high performance acrylic adhesives that provides good initial tack and offers high ultimate adhesion to a wide variety of surfaces, including low surface energy such as: PTFE, TPU, PP, PE...

#### APPLICATION

- Suitable for bonding and laminating
- General industrial use such as automotive, electronic product, nameplates,...
- Permanent attachment to metal and plastics
- Fixing electrical equipment material of office automation and consumer electronics.

#### STRUCTURE

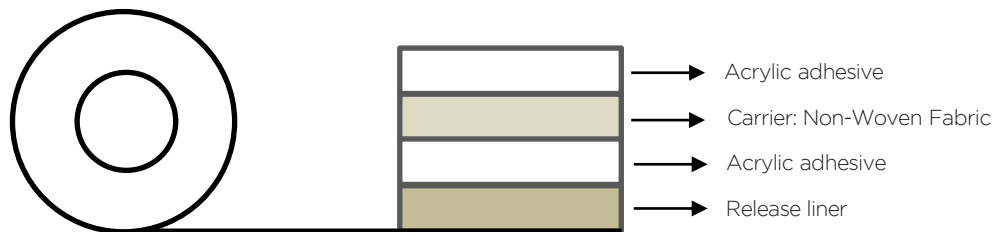

#### PROPERTIES

Properties	Value
Total thickness without liner	0.16 mm
Liner thickness	0.14mm
Thickness Tolerance	10%
Tape color	Transparent
Adhesion to steel 180° Peel off	≥ 24N/25mm
Working Temperature	-40 to 90 °C
Short term temperature resistance	150°C

## VieTape NW7200

### DOUBLE-SIDED NON-WOVEN TAPE

#### DIRECTION OF USE

Temperatures between 21-38°C are ideal for application.

For greater substrate contact, pressure-sensitive adhesives use viscous flow. Better adhesive contact is created by applying firm application pressure, which also strengthens the bond. For operation at low temperatures, this is particularly crucial.

The bonding surfaces must be thoroughly united, clean, and dry in order to achieve the best adhesion. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

#### SHELF LIFE

Store at room temperature, 15-35 °C and 40-75%RH, avoid direct sunlight.

Shelf life is 12 months from date of manufacture when store at recommended storage condition.

The above values are sample observed values, we do not guarantee the actual performance due to the different of application method, bonding design, bonding substrate.. We highly recommend customer to test in the real part

