

VieTape PV7103

PVC ANTI SLIP TAPE


DESCRIPTION

VieTape PV7103 is PVC Anti Slip tape is a type of adhesive tape that is specifically designed to provide exceptional traction on a variety of surfaces. Ideal for preventing slips and falls in hazardous areas The tape is typically made from a durable PVC backing, which provides excellent resistance to abrasion, impact, and moisture.

BENEFITS

General purpose applications: flat surfaces, steps, stairways, entrances, ramps, ladders, lawn equipment, snowmobiles, scooters, construction machinery and vehicles.

STRUCTURE

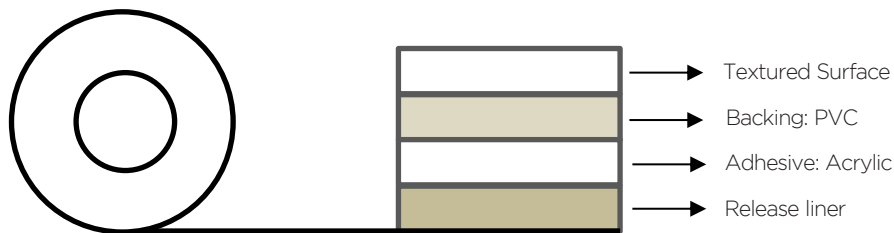

TYPICAL PERFORMANCE PROPERTIES.

Properties	Value
Color	Black, Yellow, Red (Optional)
Tape thickness	0.85mm
Thickness tolerance	10%
Length, Width	Optional
Adhesion to steel 180°	15N/25mm
Tensile Strength	60N/25mm
Elongation at break	>25%
Working Temperature	-40°C to 90°C
Friction Coefficient	R13(>0.64)



VieTape PV7103

PVC ANTI SLIP TAPE

DIRECTION OF USE

Temperatures between 21 and 38°C are ideal for application.

For greater substrate contact, apply firm application pressure, which also strengthens the bond. For operation at low temperatures, this is particularly crucial.

The surfaces must be thoroughly united, clean, and dry in order to achieve the best adhesion. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane. Please take the appropriate precautions to handle solvents safely.

SHELF LIFE

Store at room temperature, 10-30 °C, <70% RH is recommended. Avoid direct sunlight.

The shelf life is 12 months from date of manufacture when stored at recommended storage condition.

The above values are sample observed values, we do not guarantee the actual performance due to the different of application method, bonding design, bonding substrate.. We highly recommend customer to test in the real part

